



### 6pack 6 x 10A Digital Dimmer

### 3pack 3 x 25A Digital Dimmer

Strand's new 6pack and 3pack digital dimmer packs are perfect for portable, rack and wall-mounting applications.

These handy 4U high 19" packs are DMX controlled, convection cooled (no fans), and are equipped with neutral-disconnect DIN circuit breakers as standard.

6pack and 3pack are ideal for rental, educational drama spaces, and just about any place where accurate, reliable dimming is needed in a small space – and on a small budget.



6pack Dual Schuko code 75303



6pack Dual 15A code 75302



6pack Dual 16A code 75304



3pack 3 x CEE17 code 75300

## Features

- MCB (SPN) protection for each channel
- Wide range of socket options including Dual UK 15A, Schuko, French, CEE17, CEE17 (32A connector, 5kW load) and hardwired
- Suitable for portable, rack-mount and wall-mount operation (wall brackets included)
- Single or three phase operation
- Fully digital control electronics
- DMX In/Out
- Simple Set up using front panel keypad and LED display
- DMX fail hold function
- DMX termination switch
- Selectable Minimum Level for each dimmer
- Local on/off test buttons
- DMX addressing with individual patching for all dimmers
- Simple slide-out service access
- Fan free convection cooling for quiet operation



### Description

Ideal for use in small to medium size installations, rental applications and for portable use.


The 6pack and 3pack are a family of cost effective, flexible digital dimmer packs with a wide range of features and socket options.

The simple control interface enables users to set DMX address, minimum /maximum levels and dimmer curves channel by channel.

One of three dimmer curves, including linear, non-dim and square law may be assigned to each dimmer

Each channel is protected by a thermal-magnetic DIN circuit breaker, with neutral disconnect as standard, and rated at 10 Amps (2.3kW) for 6pack; 25A (5kW) for 3pack. All racks are convection cooled for quiet operation.

The sliding electronics tray gives easy service access even after installation.

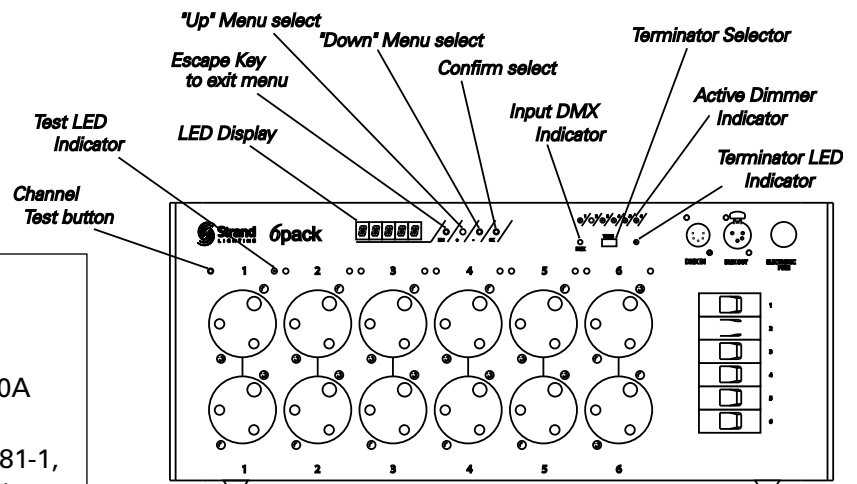

6pack Dual 15A code 75302

### Technical Specifications

Rise Time	110µs chokes (6pack) 140µs chokes (3pack)
Supply Voltage	230/240V 3 phase up to 60A
Standards Compliance:	EMC emissions to EN50081-1, EN55014; EMC immunity to EN50082-1, IEC1000-2-2;
Safety:	EN60950, EN60439 Part 1 (also part 12 BS5486); design & build: ISO9000, UL1950

The rack shall be CE marked

### Mechanical Data

Construction:	rigid folded sheet steel and aluminium, epoxy dry powder coated
Weight:	14kg
Dimensions:	178 x 483 x 250mm (HxWxD)
DMX Inputs:	single DMX In/Thru

### Environmental Data

Operating Temperature:	0 - 37° C
Humidity Range:	0 - 95% non condensing
Ingress Protection:	IP30

### Ordering Information

Cat No	Description
75301	6pack 6x10A Hardwired
75302	6pack 6x10A Dual 15A
75303	6pack 6x10A Dual Schuko
75304	6pack 6x10A Dual CEE17
75305	6pack 6x10A Dual French
75300	3pack 3x25A CEE17

**Strand Lighting Limited**  
Unit 3, Hammersmith Studios,  
Yeldham Road, London, W6 8JF  
United Kingdom  
Tel: +44 (0)20 8735 9790  
Fax: +44 (0)20 8735 9799

**Strand Lighting Italia srl**  
Via delle Gardenie 33  
00040 Pomezia-Roma, Italy  
Tel: +39 06 919631  
Fax: +39 06 9147136

**Strand Lighting Asia**  
20/F Delta House, 3 On Yiu Street  
Shatin, N.T. Hong Kong  
Tel: + 852 2757 3033  
Fax: + 852 2757 1767

**Strand Lighting Limited**  
Mitchelston Industrial Estate,  
Kirkcaldy, Fife, KY1 3LY  
United Kingdom  
Fax: +44 (0)1592 653528

**Strand Lighting GmbH**  
Kurfürstendamm 70  
10709 Berlin, Germany  
Tel: +49 30 707 9510  
Fax: +49 30 707 95199



The Company reserves the right to make any variation in design or construction to the equipment described. E&OE © Strand Lighting Ltd 2005  
Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.